



UD TRUCKS

UD3300



North America


UD3300

STANDARD SPECIFICATION

MODEL		UD3300 E	UD3300 H	UD3300 K	UD3300 M	UD3300 R
DIMENSIONS	Unit: in.					
Wheelbase †	(WB)	147.64	177.17	192.91	208.66	238.19
Cab-to-Rear Axle	(CA)	114.92	144.45	160.20	175.94	205.47
Rear Overhang	(RO)	47.64	72.83	76.97	88.58	110.24
Overall Length	(OL)	246.85	301.57	321.46	348.82	400.00
Frame End Height	(FEH)					
Leaf Suspension		42.76	42.94	42.88	42.96	43.07
Air Suspension		38.80	38.85	38.85	38.87	38.90
Typical Body Lengths (ft.) ‡		14/16	16/18	18/20	20/22	24/26
WEIGHTS	Unit: lb.					
GVWR		32,900	32,900	32,900	32,900	32,900
Chassis Weight 245hp	Front	7,185	7,320	7,385	7,430	7,530
	Rear	4,110	4,240	4,310	4,350	4,450
	Total	11,295	11,560	11,695	11,780	11,980
Gross Payload *		21,605	21,340	21,205	21,120	20,920
Chassis Weight 280hp	Front	7,410	7,540	7,610	7,650	7,750
	Rear	4,195	4,325	4,390	4,435	4,535
	Total	11,605	11,865	12,000	12,085	12,285
Gross Payload *		21,295	21,035	20,900	20,815	20,615
TURNING RADIUS	Unit: ft.	21.3	25.3	27.2	29.2	33.1

* Gross payload capacity equals GVWR minus chassis weight. Installation of specialized equipment or bodies may require frame reinforcement. † Wheelbase selection should be based on specific weight distribution. ‡ Typical body lengths assume water level load (no specific consideration for driver, passengers, or fuel) to maximize GVWR. Addition of ancillary equipment such as lift gates and refrigeration units not considered in calculations.

UD3300 Specification Diagrams

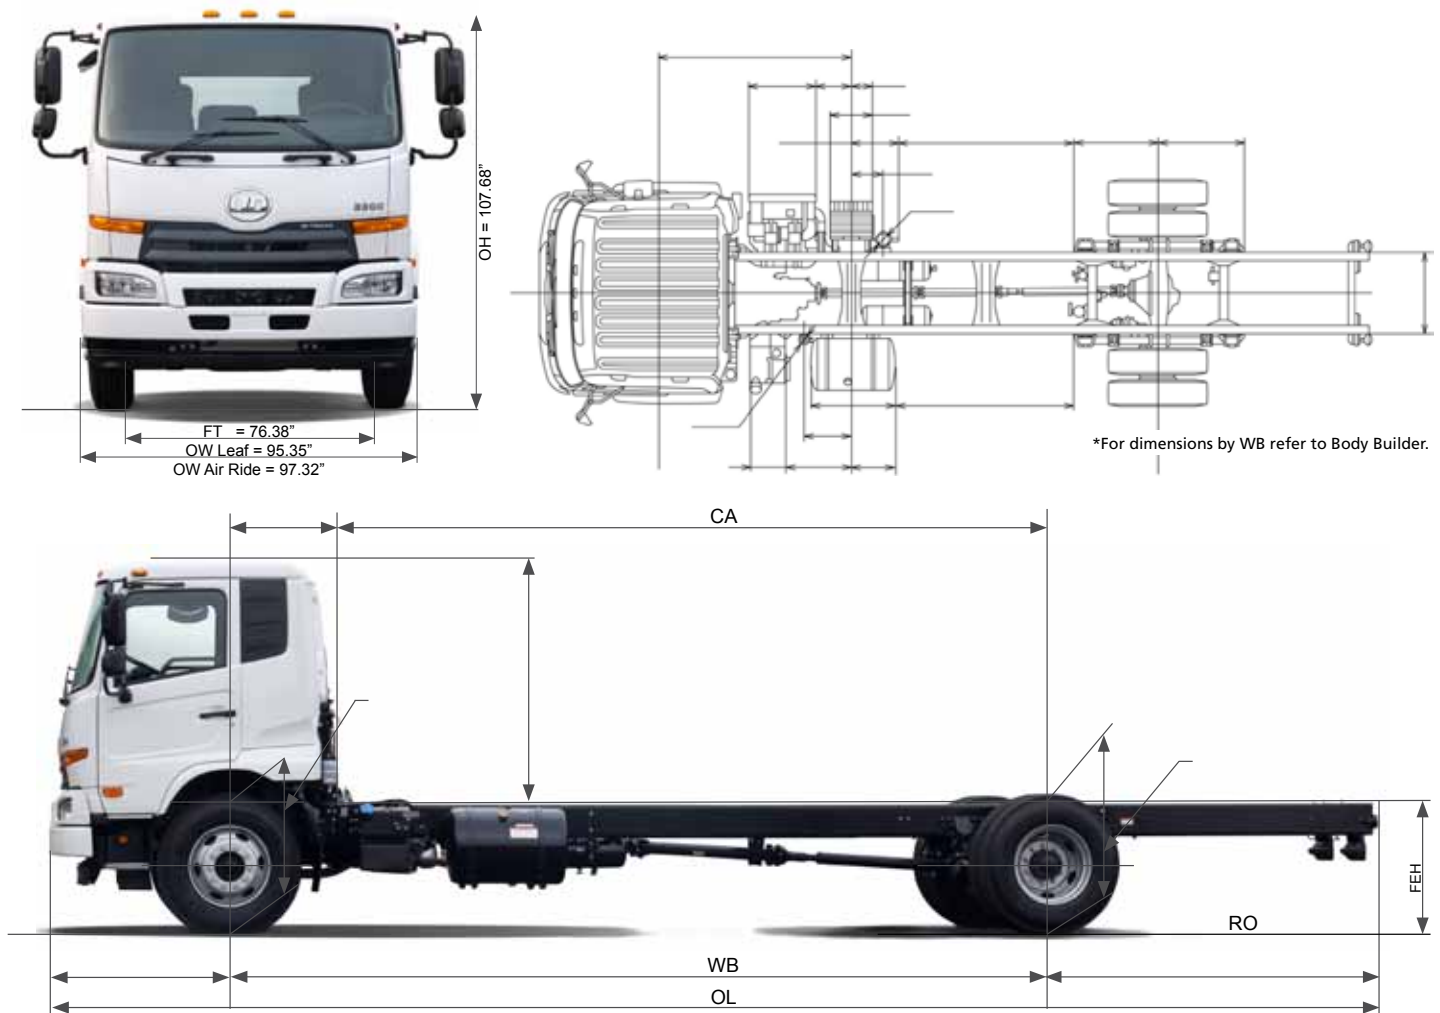

UD3300

ENGINE	GH7
	L6 OHC 24 Valves
	Turbo/Intercooled Diesel
	In-line 6 Cylinder, Direct-injection
Horsepower	245 hp @ 2,500 rpm * OPTION : 280 hp
Torque	530 lb. ft. @ 1,400 rpm * OPTION : 650 lb. ft.
Displacement	427 in. ³ (7.0 L)
Cylinder Liner	Dry, Replaceable
Air Compressor	12.4 CFM @ 2,600 Engine rpm (Nominal)
Fuel System	Electronically Controlled Common Rail System
Air Cleaner	11 in., Paper Filter Type (DONALDSON)
Cold Starting Aid	Automatic Electric Air Preheater
Fan	Viscous Type Drive
Battery Cold Crank Amps	565 amp (x2 = 1,130 amps) / 95D31R
Alternator	160 amp

CHASSIS FRAME	Ladder Type, Channel Section Side Rail
Dimensions (in.)*	9.84 x 3.15 x 0.31
Assembled Width (in.)	33.9
Section Modulus (in. ³)	17.9 (With Reinforcement) (13.3 - W/B - E Only, Without Reinforcement)
Yield Strength (psi)	51,200
RBM (in. - lb.)** Per Rail	914,000 (681,000 - W/B - E Only)

* Height x Flange Width x Thickness

** Minimum across load platform

Refer to current Body Builder for additional details

FRONT AXLE	
GAWR	11,900 lb.
Axle Type	"1" Beam
Suspension	Semi-elliptic Leaf Springs
Shock Absorbers	Telescopic Type

REAR AXLE	
GAWR	21,000 lb.
Axle Type	Full-floating Banjo Housing
Suspension	Semi-elliptic Leaf Springs with Auxiliary Springs

TIRES	Front: Single, Highway Tread Rear: Dual, Highway Tread 11R22.5 - 14PR (Tubeless Radial)
WHEELS	Steel Disc Type, 10 Hole, 22.5 x 8.25 in., Offset 6.50 in.

CAB	Forward Control, Steel Construction, Tilting Cab; Cab Suspension with Shock Absorbers
Air Conditioner	Standard
Cab Glass	Windshield, Tinted Laminated, 2,273 in. ²
Cruise Control	Standard
Driver's Seat	Height & Seat Back Angle, Adjustable Lumbar w/Air Suspension, Cloth Cover, High Back Type
Passenger Seat	Seat Back Angle Adjustable, Cloth Cover, High Back
Keyless Entry	Standard
Power Windows & Door Locks	Standard
Seat Belts	Driver & Passenger, 3-Point ELR Type
Rearview Mirrors	West Coast Type, 14.2 x 7.3 in. Convex Type, 7.1 x 7.1 in. Convex Type (Side), 7.1 x 11.8 in. Passenger Side Down View Mirror
Steering Column	Tilt & Telescopic Type
Sun Visors	Driver & Passenger
Windshield Wipers	Intermittent & 2 Speed

CLUTCH	Hydraulic Clutch with Air Assist 13.8 in. Cerametallic Friction Material (15.0 in. - GH7 280HP Engine Option) Standard Clutch Wear Indicator
---------------	---

STEERING	Integral Power Steering, Gear Driven Pump
-----------------	--

TRANSMISSION	STANDARD			OPTION			* OPTION				* OPTION			
	MLS63B Manual 6 Forward Speeds & 1 Reverse, Synchronesh on 2nd through 6th Gears			Allison 2500RDS Automatic* 5 Forward Speeds & 1 Reverse			MPS63B Manual** 6 Forward Speeds & 1 Reverse, Synchronesh on 2nd through 6th Gears				Allison 3000RDS Automatic** 6 Forward Speeds & 1 Reverse			
Ratios														
1st		6.718			3.512			7.027				3.490		
2nd		4.031			1.896			4.277				1.860		
3rd		2.303			1.439			2.493				1.410		
4th		1.443			1.000			1.500				1.000		
5th		1.000			0.737			1.000				0.750		
6th		0.740						0.780				0.650		
Rev.		6.121			5.086			7.038				5.030		
R/A Ratio	5.57	5.86 Std	6.83	5.14	5.57	5.86 Std	4.88	5.14 Std	5.57	5.86	5.57 Std	5.86	6.17	6.50
Engine RPM @ 65 MPH	2,252	2,367	2,762	2070	2,243	2,358	2,077	2,191	2,374	2,495	1,978	2,079	2,189	2,308
GCWR (lbs.)	41,005	43,100	50,000	33,000	33,000	33,000	50,715	53,580	57,770	58,430	57,770	58,430	57,990	55,565

* Available with GH7 245HP Engine Only

** Available with GH7 280HP Engine Only

UD3300

BRAKE SYSTEM

Service Brakes	Anti-lock Braking System Dual Line, Full Air Brake System
Front	Internal Expanding, Two Leading Shoe, Self-Adjusting Drum Brakes Drum Diameter x Lining Width x Lining Thickness: 16.14 x 5.91 x 0.63 in.
Rear	Internal Expanding, Dual Two Leading Shoe, Self-Adjusting Drum Brakes Drum Diameter x Lining Width x Lining Thickness: 16.14 x 8.66 x 0.63 in.
Air Tanks	Supply: 2,014 in. ³ Front Service: 732 in. ³ Rear Service: 1,086 in. ³ Total: 3,832 in. ³
Air Dryer	Standard
Rear Parking Brake	Standard at Rear Wheel

EXHAUST BRAKE

Electrically Controlled,
Pneumatically Activated
Butterfly Valve in Exhaust Pipe

FUEL TANK

Round Fuel Tank, Mounted to Left Side
Capacity - 50 Gallons

DEF TANK

Capacity: 5 Gallons, W/B - E-H
(For SCR Urea Solution) 13 Gallons, W/B - K-R

ELECTRICAL EQUIPMENT

Back-up Lights
Cigar Lighter
Clearance, Identification & Position Lights
Day-time Running Lights
Halogen Headlights, 2 Lamps
Interior and Map Light
License Light
Power Outlet - 12 Volt
Side Turn Signal Lights
Stop/ Tail Lights

INSTRUMENTS

Meters & Gauges	Air Pressure Gauges Coolant Temperature Gauge Fuel Gauge, DEF Gauge Speedometer, Odometer & Trip Meter Tachometer
Gauges in Multi Display	Ash Level Gauge Coolant Temperature Gauge Engine Oil Pressure Gauge Engine Oil Temperature Gauge Soot Level Gauge Voltmeter
Warning & Indicator Lights & Buzzers	ABS Warning Light Air-Ride Suspension Warning Buzzer Automatic Transmission: -Fluid Maintenance Warning Light -Range Inhibited Warning Light Brake Warning Light Coolant Level Warning Light & Buzzer Cruise Control "ON" & "SET" Indicator Lights DEF Low Level Warning Light Engine Air Heater Indicator Light Engine Control Warning Light Exhaust Brake Indicator Light High Beam Indicator Light High Exhaust Temperature Warning Light Low Air Pressure Warning Light & Buzzer Reverse Buzzer for Automatic Transmission

INSTRUMENTS

(Continued)

Warning & Indicator Lights & Buzzers	Seat Belt Warning Light Soot Deposit Accumulation Warning Light Tilt Lock Warning Light & Buzzer Turn Signal & Hazard Indicator Light & Buzzer
Warning & Indicator Lights & Buzzers in Multi Display	Automatic Transmission: -Check Warning -Fluid Temperature Warning & Buzzer Charge Warning DEF Low Level Warning DEF Quality Warning DPF Maintenance Warning DPF Regeneration Indicator DPF Regeneration Inhibit Warning DPF System Warning & Buzzer Engine Communication Malfunction Warning Engine Derated Warning Engine Oil: -Low Level Warning & Buzzer -Pressure Warning & Buzzer -Temperature Warning & Buzzer Engine Overrun Warning & Buzzer Engine System Warning & Buzzer Idle Shutdown Warning & Buzzer Meter Communication Malfunction Warning Overheat Warning & Buzzer Starter Overheat Warning Transmission PTO Indicator Vehicle Electrical System: -Communication Malfunction Warning -Malfunction Warning
Other Functions in Multi Display	Automatic Transmission: -O/D OFF Indicator Light -Power Mode Indicator Light -Shift Position Indicator Light Calendar Diagnostics (for EMS, VECU, NICU) Hour Meter/ Trip Hour Meter Maintenance Inspection Odometer/ Trip Meter Operation Control
Other Functions	Illumination Control

OPTIONS

Factory	Locking Cap DEF Tank Non Spin Differential Power Mirrors Power/ Heated Mirrors Rear Shock Absorber (n/a with Air Suspension) Reduced Deflection Springs Traction Tires
Port	90 Gallon Fuel Tank - Aluminum (K-R WB) AM/FM Stereo Radio with CD Center Console/ Third Seat

All illustrations, specifications and descriptions in this specification are based on the latest product information available at the time of this publication. The right is reserved to make changes in price, materials, equipment, design, specifications, diagrams and models, and to discontinue models of equipment at any time, without notice and without incurring any obligation whatsoever. For more information on additional options and accessories, contact UD Trucks North America, Inc.

Manufacturer:
UD Trucks Corporation
Saitama, Japan
www.udtrucks.com

Distributor:
UD Trucks North America, Inc.
www.udtrucksna.com

Department:	Sales
Section:	Specifications
Model:	UD3300
Model Year:	2011
Effective Date:	2/14/2011
Form #:	UDSPEC-33
Rev #:	6